

CBS-10K

10 kW PEAK SINGLE OUTPUT DC/DC CONVERTER

GENERAL FEATURES:

- High input-output isolation 5000 V_{rms}
- Remote off opto-coupled
- Alarm by isolated relay contacts
- Remote control via RS232
- CAN BUS (optional)
- Redundant configuration
- Railway version EN50155
- Fire and smoke: EN45545-2 approved
- Up to 10 kW during 40 s
- O-ring output diode up to 2000V



		Input			
		24 V _{dc} 16.8 ... 30 V	48 V _{dc} 33.6 ... 60 V	72 V _{dc} 50.4 ... 90 V	110 V _{dc} 77 ... 138 V
Output	500 V _{dc}	CBS-10K-6001 5200 W _{pk}	CBS-10K-6003 10000 W _{pk}	CBS-10K-6004 10000 W _{pk}	CBS-10K-6005 10000 W _{pk}

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.

**INPUT**

Input voltage range	-30, +25 % Vin nom
Maximum input ripple	5 % Vin nom (V _{rms} , 100 Hz)

OUTPUT

Nominal output voltage (Von)	See table
Output voltage range	< 1%
Load regulation	< 1 %
Line regulation	< 0.2 %
Maximum Iopk time	40 s
Maximum continuous power	6 kW
Peak power	10 kW
Ripple	< 1 V _{pp}
Ripple + noise (BW 20 MHz)	< 5 V _{pp}

ENVIRONMENTAL

Storage temperature	-40 ... 80 °C
Operating temperature: Full load	-25 ... 55 °C (EN50155 OT1)
Operating temperature: 62.5 % load	-25 ... 70 °C (EN50155 OT3)
Operating temperature: 25 % load	-25 ... 85 °C (EN50155 OT5)
Relative humidity without condensation	5 ... 95 %
Cooling	Internal controlled fan
Maximum altitude	2000m at full load, 2500m at 90% of load
MTBF (According to IEC61709, SN29500 @40°C)	200.000 h

EMC

Immunity according	EN61000-6-2:2005, EN50121-3-2:2016
Emissions according	EN61000-6-4:2007, EN50121-3-2:2016

SAFETY

Dielectric strength: Input /output	5000 V _{rms} / 50 Hz / 1 min
Dielectric strength: Output / Earth	5000 V _{rms} / 50 Hz / 1 min
Dielectric strength: Input / Earth	1500 V _{rms} / 50 Hz / 1 min
Safety according to	EN62368-1:2014
Fire and smoke	EN45545-2:2013

MECHANICAL

Weight	< 7 kg
Shock and Vibrations according to	EN61373:2011 Category 1 Class B
Protection degree	IP20

PROTECTIONS

Against overloads	Current and I ² t limited with auto-recovery
Against over-temperature	Shutdown with auto-recovery

CONTROL

Output OK LED	Red
Input OK LED	Green
Input alarm	Open when alarm Alarm when Vin is out of input voltage range Closed < 30 Ω. Maximum rating: 0.13 A at 160 V _{dc}
Output alarm	Open when alarm Alarm when Vout is out of ±10% Closed < 30 Ω. Maximum rating: 0.13 A at 160 V _{dc}
Remote OFF input	Off applying 15...143 V _{dc} , Impedance >24 kΩ



ORDERING CODES


Model	Input				Output					Efficiency
	Voltage		Current		Voltage	Max power		Max current		
	Nom	range	No load	Max	Nom	Average	Peak	RMS	Iopk 40s	
	[V]	[V]	[A]	[A]	[V]	[kW]	[kW]	[A]	[A]	
CBS-10K-6001	24	16.8 - 30	< 1.1	320	500	3.5	5.2	7.0	10.2	> 93
CBS-10K-6003	48	33.6 - 60	< 0.55	310	500	6.0	10	12	20	> 94
CBS-10K-6004	72	50.4 - 90	< 0.34	209	500	6.0	10	12	20	> 95
CBS-10K-6005	110	77 - 138	< 0.22	137	500	6.0	10	12	20	> 95.5

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.


Accessories must be ordered in a separate order line.



BLOCKS DIAGRAM

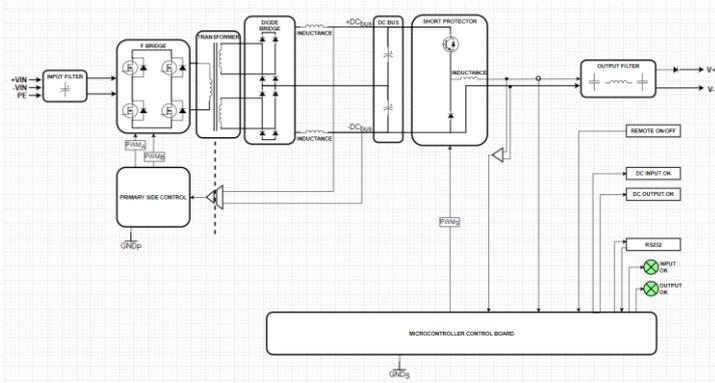

CONNECTIONS

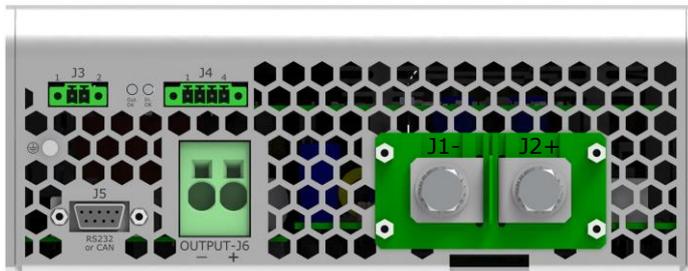

J1	-Vin	Terminal M8 (Rec. torque 5 Nm)
J2	+Vin	
J3 - 1	+ Remote	Phoenix Contact MC1.5/2-GF-3.81 Recommended female: Phoenix Contact MC1.5/2-STF-3.81
J3 - 2	- Remote	
J4 - 1	Status output	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J4 - 2	Status output	
J4 - 3	Status input	
J4 - 4	Status input	
J5 - 2	RS232 RX	Female D-Sub DB9
J5 - 3	RS232 TX	
J5 - 5	RS232 GND	
J5 - 2	CAN L (option Can bus)	
J5 - 7	CAN H (option Can bus)	
J5 - 3	CAN GND (option Can bus)	
J6 - 1	- Vout	
J6 - 2	+Vout	

DESCRIPTION

The CBS-10K series consists of DC/DC converters, with a galvanic isolation between input and output, operating at fixed switching frequency.

The unit can deliver up to 6 kW average and up to 10 kW during 40s (see data table) being protected against overload and short-circuits.

The unit includes an ORing diode at the output to decouple it from lines up to 2 kV

START-UP

- The unit has 6 threaded M4 holes for the fixation on a mounting surface (maximum deep 5 mm)
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause an air flow reduction (minimum recommended distance to other objects 90mm).
- **For safety reasons, the following requirements must be met:**
- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an external input overcurrent protection (fuse or breaker) with a rating immediately higher than the maximum input current.
- Use cables of adequate cross-section to connect inputs and outputs. The following table lists the maximum currents and the minimum cross-sections for the cables used for each power connection.

	Input 24 V	Input 48 V	Input 72 V	Input 110 V	Output 500 V
Maximum current	320 A	310 A	208 A	137 A	10 A
Cable cross-section	95 mm²	95 mm²	50 mm²	25 mm²	2.5 - 4 mm²



RS232 communication port

It is possible to control and monitor the unit via RS232 by means of an application tool named PAM. This application is free and can be downloaded from the Premium website.

Also it is possible to control and monitor the unit directly using the protocol showed in table:


Protocol configuration: ASCII code, 9600 bauds, parity none, 8 bits, 1bit stop

Header	Function	Parameter	Returns	Explanation	
P	R	L	V	PTV####	Input voltage in Volts
			v	PTv####	Input voltage ripple in Volts
			U	PTU####	Output voltage in Volts
			I	PTI####	Output current in Amps
			T	PTT####	Internal temperature 1 in K
			t	PTt####	Internal temperature 2 in K
			S	PTS####	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit
			M	PTM####	Model number
			R	PTR####	Firmware version
			Other	PTE	Command not supported
	G	1	####	OK / ERR	Set the low input voltage timed shutdown in V
		2	####	OK / ERR	Set the minimum alarm input voltage in V
		3	####	OK / ERR	Change the status bit 999.9 → Converter enabled 000.0 → Converter disabled
		5	####	OK / ERR	Set the maximum output current in Arms $20\% I_{nom} \leq \text{####} \leq 100\% I_{nom}$
		7	####	OK / ERR	Set the alarm maximum output current $0 < \text{####} \leq 100\% I_{max_warning}$
		8	####	OK / ERR	111.1 → Reset the converter

OTHER PORTS PENDING




DIMENSIONS

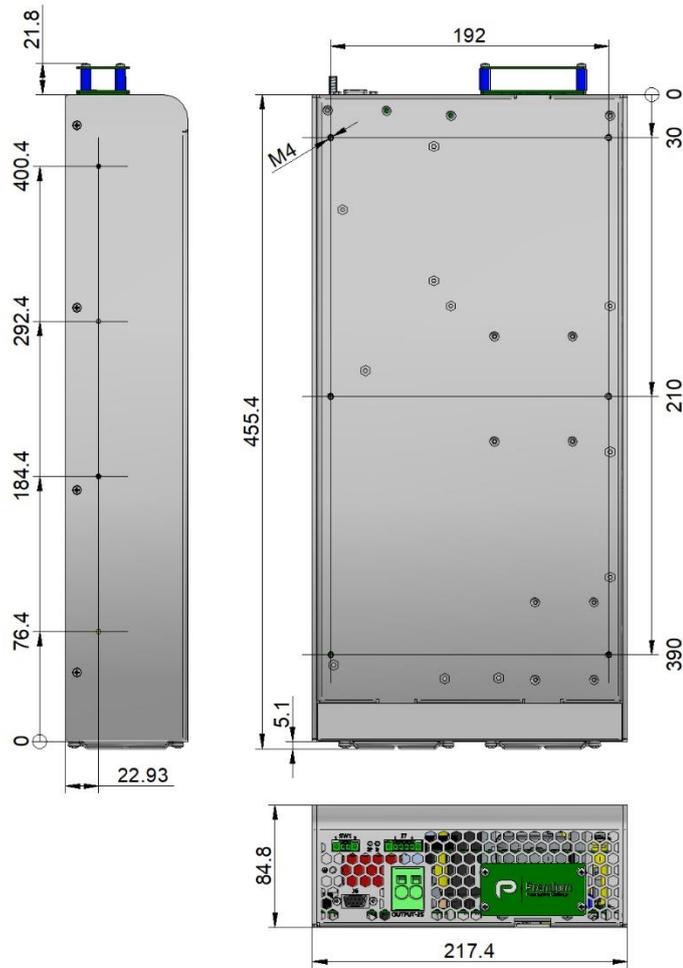

NOTE: All the fixing holes are M4. Maximum screw length inside the converter 5mm

ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	NP-9282

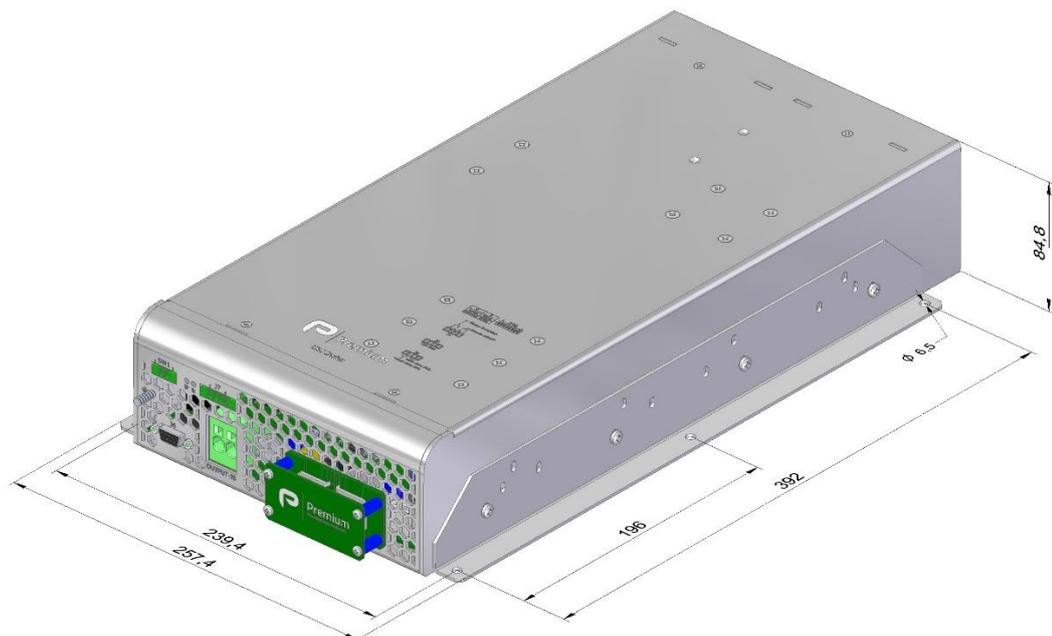



CE EU DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/DC converter
Models: **CBS-10K-6001 ... 6005**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

N 62368-1: 2014	Safety. Audio/video information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
EN 50155: 2017*	Railway applications. Electronic equipment used on rolling stock material
EN 50121-3-2: 2016*	Railway applications. EMC Rolling stock equipment

* Optional, See annexe

CE marking year: **2021**

Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 19-04-2021

Albert Solé
Technical director

PREMIUM S.A. is an ISO9001 and ISO14001
certified company by **Bureau Veritas**

ANNEXE

Applicable values for the different sections of the norm EN50155: 2017																																																																		
4.3.1	Working altitude	Up to 2000m																																																																
4.3.2	Ambient temperature	Class OT1 (-25 to 55°C): load < 100% Class OT3 (-25 to 70°C): load <62.5% Class OT5 (-25 to 85°C): load <25%																																																																
4.3.3	Switch-on extended operating temp.	ST1																																																																
4.3.4	Rapid temperature variations	H1																																																																
4.3.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																																
4.3.6	EMC Electromagnetic Compatibility EN50121-3-2:2016	<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Frequency</th> <th>Limits</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Radiated emissions</td> <td rowspan="3">IEC55016</td> <td rowspan="3">Case</td> <td>30MHz...230MHz</td> <td>40dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>230MHz...1GHz</td> <td>47dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>1...3GHz</td> <td>Do not apply</td> </tr> <tr> <td></td> <td></td> <td></td> <td>3...6GHz</td> <td>Internal freq. < 108MHz</td> </tr> <tr> <td rowspan="2">Conducted emissions</td> <td rowspan="2">IEC55016</td> <td rowspan="2">Input</td> <td>150kHz...500kHz</td> <td>99dB(µV) Qpk</td> </tr> <tr> <td>500kHz...30MHz</td> <td>93dB(µV) Qpk</td> </tr> </tbody> </table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m	230MHz...1GHz	47dB(µV/m) Qpk at 10m	1...3GHz	Do not apply				3...6GHz	Internal freq. < 108MHz	Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk	500kHz...30MHz	93dB(µV) Qpk																																						
		Test	Norm	Port	Frequency	Limits																																																												
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m																																																												
					230MHz...1GHz	47dB(µV/m) Qpk at 10m																																																												
					1...3GHz	Do not apply																																																												
					3...6GHz	Internal freq. < 108MHz																																																												
		Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk																																																												
					500kHz...30MHz	93dB(µV) Qpk																																																												
		<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Severity</th> <th>Conditions</th> <th>P</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Electrostatic discharge</td> <td rowspan="2">IEC61000-4-2</td> <td rowspan="2">Case</td> <td>±8kV</td> <td>Air (isolated parts)</td> <td rowspan="2">B</td> </tr> <tr> <td>±8kV</td> <td>Contact (conductive parts)</td> </tr> <tr> <td rowspan="4">Radiated high-frequency</td> <td rowspan="4">IEC61000-4-3</td> <td rowspan="4">X/Y/Z Axis</td> <td>20V/m</td> <td>0.08...1.0GHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V/m</td> <td>1.4...2.1GHz M. 80% 1kHz</td> </tr> <tr> <td>5V/m</td> <td>2.1...2.5GHz M. 80% 1kHz</td> </tr> <tr> <td>3V/m</td> <td>5.1...6Ghz M. 80% 1kHz</td> </tr> <tr> <td rowspan="4">Fast transients</td> <td rowspan="4">IEC61000-4-4</td> <td>Input</td> <td>±2kV</td> <td rowspan="4">Tr/Th: 5/50 ns</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>±2kV</td> </tr> <tr> <td>Signal</td> <td>±2kV</td> </tr> <tr> <td>PE</td> <td>±1kV</td> </tr> <tr> <td rowspan="2">Surge</td> <td rowspan="2">IEC61000-4-5</td> <td>Input L to L</td> <td>±1kV</td> <td rowspan="2">Tr/Th: 1.2/50µs</td> <td rowspan="2">B</td> </tr> <tr> <td>Input L to PE</td> <td>±2kV</td> </tr> <tr> <td rowspan="4">Conducted RF</td> <td rowspan="4">IEC61000-4-6</td> <td>Input</td> <td>10V</td> <td rowspan="4">0.15...80MHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>10V</td> </tr> <tr> <td>Signal</td> <td>10V</td> </tr> <tr> <td>PE</td> <td>10V</td> </tr> <tr> <td>Magnetic field</td> <td>IEC61000-4-8</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>0Hz, 16.7Hz, 50/60Hz</td> <td>A</td> </tr> </tbody> </table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6Ghz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV	PE	±1kV	Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A
		Test	Norm	Port	Severity	Conditions	P																																																											
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																											
					±8kV	Contact (conductive parts)																																																												
		Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																											
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																												
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																												
3V/m	5.1...6Ghz M. 80% 1kHz																																																																	
Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																													
		Output	±2kV																																																															
		Signal	±2kV																																																															
		PE	±1kV																																																															
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B																																																													
		Input L to PE	±2kV																																																															
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																													
		Output	10V																																																															
		Signal	10V																																																															
		PE	10V																																																															
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																													
P = Performance criteria, L= Line, PE= Protective Earth																																																																		
4.3.7	Relative humidity	Up to 95%																																																																
5.1.1.2	DC power supply range	From 0.70 to 1.25 Un continuous																																																																
5.1.1.3	Temporary DC power supply fluctuation	From 0.60 to 1.40 Un 0.1s From 1.25 to 1.40 Un 1s without damage																																																																
5.1.1.4	Interruptions of voltage supply	Class S1 (without interruptions)																																																																
5.1.1.6	Input ripple factor	10% peak to peak with a DC Ripple Factor of 5 %																																																																
5.1.3	Supply change-over	0.6 Un duration 100 ms (without interruptions). Performance criterion A																																																																
7.2.7	Input reverse polarity protection	By external fuse																																																																
10.7	Protective coating for PCB assemblies	Class PC2																																																																
13.3	Tests list	<table border="0"> <tr> <td>1 Visual Inspection</td> <td>Routine</td> </tr> <tr> <td>2 Performance test</td> <td>Routine</td> </tr> <tr> <td>3 Power supply test</td> <td>Routine</td> </tr> <tr> <td>4 Insulation test</td> <td>Routine</td> </tr> <tr> <td>5 Low temperature storage test</td> <td>-</td> </tr> <tr> <td>6 Low temperature start-up test</td> <td>Type</td> </tr> <tr> <td>7 Dry heat test</td> <td>Type</td> </tr> <tr> <td>8 Cyclic damp heat test</td> <td>Type</td> </tr> <tr> <td>9 Salt mist test</td> <td>-</td> </tr> <tr> <td>10 Enclosure protection test (IP code)</td> <td>-</td> </tr> <tr> <td>11 EMC test</td> <td>Type</td> </tr> <tr> <td>12 Shocks and vibrations test</td> <td>Type</td> </tr> <tr> <td>13 Equipment stress screening test</td> <td>Routine: 24h at 40°C and load 100%</td> </tr> <tr> <td>14 Rapid Temperature variation test</td> <td>Type</td> </tr> </table>	1 Visual Inspection	Routine	2 Performance test	Routine	3 Power supply test	Routine	4 Insulation test	Routine	5 Low temperature storage test	-	6 Low temperature start-up test	Type	7 Dry heat test	Type	8 Cyclic damp heat test	Type	9 Salt mist test	-	10 Enclosure protection test (IP code)	-	11 EMC test	Type	12 Shocks and vibrations test	Type	13 Equipment stress screening test	Routine: 24h at 40°C and load 100%	14 Rapid Temperature variation test	Type																																				
1 Visual Inspection	Routine																																																																	
2 Performance test	Routine																																																																	
3 Power supply test	Routine																																																																	
4 Insulation test	Routine																																																																	
5 Low temperature storage test	-																																																																	
6 Low temperature start-up test	Type																																																																	
7 Dry heat test	Type																																																																	
8 Cyclic damp heat test	Type																																																																	
9 Salt mist test	-																																																																	
10 Enclosure protection test (IP code)	-																																																																	
11 EMC test	Type																																																																	
12 Shocks and vibrations test	Type																																																																	
13 Equipment stress screening test	Routine: 24h at 40°C and load 100%																																																																	
14 Rapid Temperature variation test	Type																																																																	