




MQB Series

75W / Ultra input Quarter Brick DC/DC

Applications

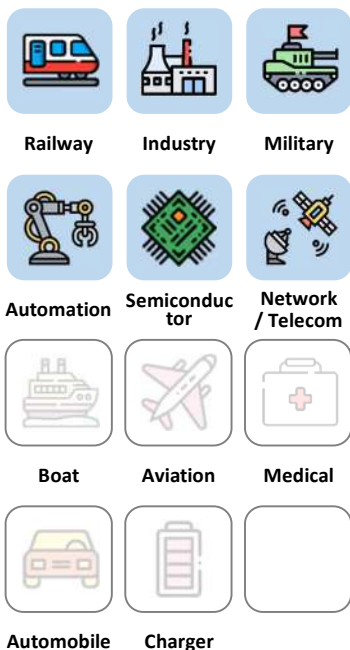

3 Years Warranty



Features

1/4 Brick	4:1/8:1/12:1 Wide input range	DOSA Pin out	Single/Dual Multi Output	PI FILTER Built-in	2250 VDC Insulation	MLCC No life-span constrained	90 % High efficiency
ON / OFF REMOTE	METAL CASE	UVLO	OCP	OVP	OTP		

Model Number Structure

MQB 028 050 - S - P - B 75

Series Name	Input Voltage (VDC)	Output Voltage (VDC)	Output Quantity	Remote Control Option	Shape	Watt		
Mercury series Quarter Brick	028 : 9-75 054 : 14-154	050 : 5	S : Single	P : Positive logic N : Negative logic	B : Base Plate	50		
		120 : 12						
		150 : 15						
		240 : 24						
		120 : ±12	D : Dual			75		
		150 : ±15						
		240 : ±24						



Model Selection Guide

Typical @ Ta=+25 °C under nominal line voltage conditions unless noted

Model	Input			Output			Efficiency	Max. capacitive Load μF
	Voltage (V)		Current (A)	Voltage	Current	Power		
	Range	Nominal	Full load	(V)	(A)	(W)		
MQB028050-S-□-B50	9 - 75	28	1.98	5	10.0	50	90	18000
MQB028120-S-□-B50	9 - 75	28	2.01	12	4.2	50	89	5000
MQB028150-S-□-B50	9 - 75	28	2.01	15	3.3	50	89	3200
MQB028240-S-□-B50	9 - 75	28	2.01	24	2.1	50	89	1200
MQB028120-D-□-B50	9 - 75	28	2.01	±12	2.1	50	89	1000
MQB028150-D-□-B50	9 - 75	28	2.01	±15	1.7	50	89	500
MQB028240-D-□-B50	9 - 75	28	2.01	±24	1.0	50	89	200
MQB028050-S-□-B75	9 - 75	28	3.01	5	15	75	89	18000
MQB028120-S-□-B75	9 - 75	28	3.04	12	6.25	75	88	5000
MQB028150-S-□-B75	9 - 75	28	3.04	15	5	75	88	3200
MQB028240-S-□-B75	9 - 75	28	3.04	24	3.125	75	88	1200
MQB028120-D-□-B75	9 - 75	28	3.04	±12	3.13	75	88	1000
MQB028150-D-□-B75	9 - 75	28	3.04	±15	2.5	75	88	500
MQB028240-D-□-B75	9 - 75	28	3.04	±24	1.56	75	88	200
MQB054050-S-□-B50	14 - 154	54	1.03	5	10.0	50	90	18000
MQB054120-S-□-B50	14 - 154	54	1.04	12	4.2	50	89	5000
MQB054150-S-□-B50	14 - 154	54	1.04	15	3.3	50	89	3200
MQB054240-S-□-B50	14 - 154	54	1.04	24	2.1	50	89	1200
MQB054120-D-□-B50	14 - 154	54	1.04	±12	2.1	50	89	1000
MQB054150-D-□-B50	14 - 154	54	1.04	±15	1.7	50	89	500
MQB054240-D-□-B50	14 - 154	54	1.04	±24	1.0	50	89	200
MQB054050-S-□-B75	14 - 154	54	1.56	5	15	75	89	18000
MQB054120-S-□-B75	14 - 154	54	1.58	12	6.25	75	88	5000
MQB054150-S-□-B75	14 - 154	54	1.58	15	5	75	88	3200
MQB054240-S-□-B75	14 - 154	54	1.58	24	3.125	75	88	1200
MQB054120-D-□-B75	14 - 154	54	1.58	±12	3.13	75	88	1000
MQB054150-D-□-B75	14 - 154	54	1.58	±15	2.5	75	88	500
MQB054240-D-□-B75	14 - 154	54	1.58	±24	1.56	75	88	200

Description

Multiple Output series - Quarter Brick converter is composed of Isolated, board-mountable, fixed switching frequency dc-dc converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications.

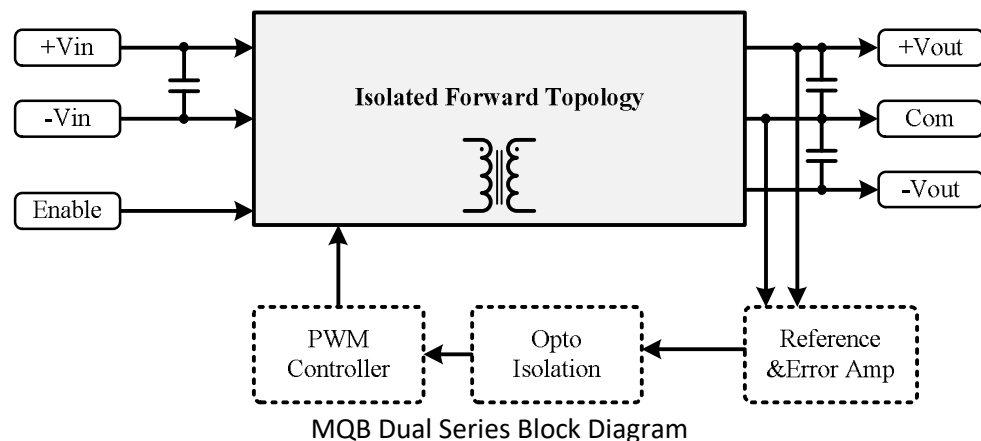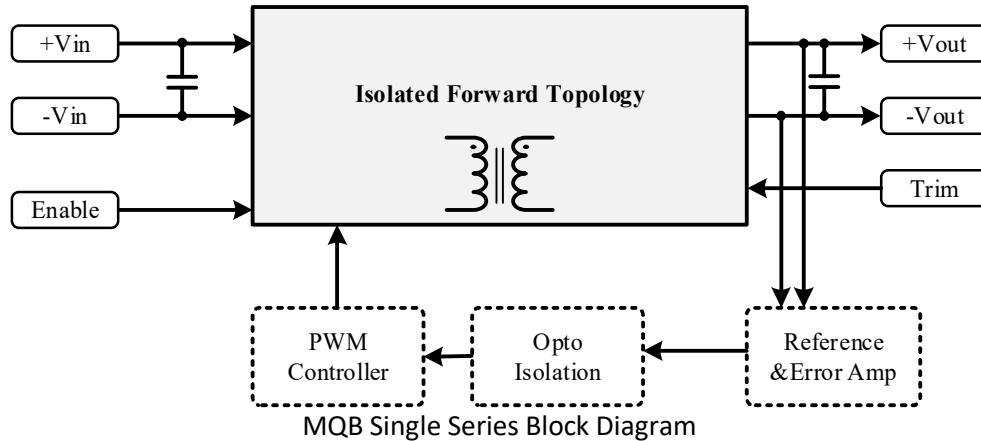

Electrical Specifications

(Typical @ Ta=+25°C under nominal line voltage conditions unless noted.)

Input Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Transient Input Voltage Ranges	MQB028 models (100ms Max) MQB054 models (100ms Max)			80 160	VDC
Operating Input Voltage Ranges	MQB028 models MQB054 models	9 14	28 54	75 154	VDC
Under-Voltage Lockout Start up Voltage	MQB028 models MQB054 models			9 14	VDC
Under-Voltage Lockout Shutdown Voltage	MQB028 models MQB054 models		7 12		VDC
Enable Function Input	Positive logic ON OFF	Open Short or 0 ~ 1.2			VDC
	Negative logic ON OFF	Short or 0 ~ 1.2 Open			VDC

Output Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	V _{NOM} 50% Load			±1.5	%
Line Regulation	Low Line to High Line			±0.3	%
Load Regulation	10% to 100% Load			±0.5	%
Minimum Load	Single output	0			%
	Dual output	0			%
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 1μF MLCC Output Capacitor each output		1.5		%V _{pk-pk}
Temperature Drift				±0.04	% / °C
Transient Recovery Time	25% load step change		800		μSec.
Transient Peak Deviation	ΔI _o /Δt=2.5A/us		±2		%V _o
Start-Up Time	When use Enable Function		20		mSec.
Trimming Output Voltage	V _{NOM} 10% Load		±10		%
Over Voltage Protection	V _{NOM} 10% Load		120		%
Output Power Protection	V _{NOM}		120		%

General Specifications & Environmental Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	V _{NOM}		220		kHz
Storage Temperature Range	All models	-60		125	°C
Operating Case Temperature	All models	-45		105	°C
Over temperature Protection	All models, Auto. Recovery		110		
Isolation Voltage Input to Output Input & Output to Case	All models, 1 Minute		2250 1500		VDC
Isolation Resistance Input to Output	All models, 500VDC, At 70%RH	100			MΩ
Isolation Capacitance Input to Output	All models		1500		pF
Humidity (non condensing)	All models			95	%
Calculated MTBF	BellCore-TR-332@ 50°C G.B		1		M HR
Weight	Shape-B		68		g (oz.)
Dimensions	Shape-B	2.36" x 1.57" x 0.49" (60.0 x 40.0 x 12.4mm)			
Case Material	Aluminum				

Standards Compliance

Parameter	Standard	Test Conditions	Performance Criteria
Environmental Compliance	Reach; RoHS		PASS
EMI	EN55022		Class A / Class B
ESD	EN61000-4-2	±4 kV Air Discharge ±4 kV Contact Discharge	Crit. A
Radiated Immunity	EN61000-4-3	Level 2, 3 V/m	Crit. A
Fast Transient	EN61000-4-4	±2 kV Applied	Crit. A
Surge	EN61000-4-5	±2 kV Applied	Crit. A
Conducted Immunity	EN61000-4-6	Level 2, 3 V rms	Crit. A

It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55022 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.


Shape – B



Pin#	Single	Dual
1	-Vin	-Vin
2	Enable	Enable
3	+Vin	+Vin
4	+Vout	+Vout
5	NA	NA
6	Trim	Common
7	NA	NA
8	-Vout	-Vout

Tolerances: .XX±0.02 [.X±0.5mm]

Input terminal value (typ.) MQB028240-S-P-B50 @Vin = 28VDC, Iout = 2.08A

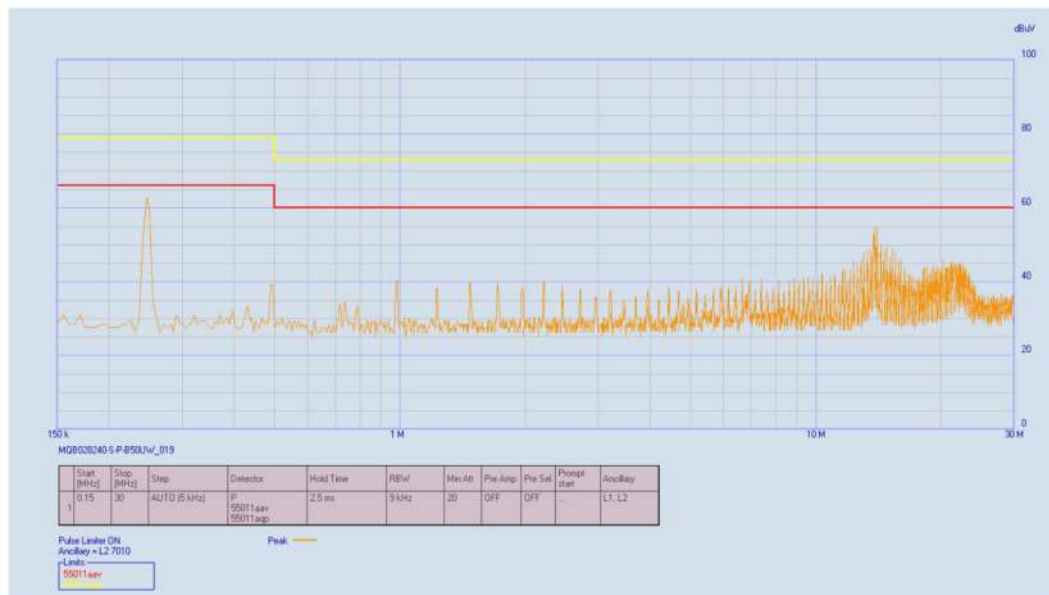

Characteristic Curves

Testing conditions are at typical input, $T_a = +25^\circ\text{C}$, full load (horizontal mount) Unless otherwise indicated

The figures of MQB054050-S-P-B50

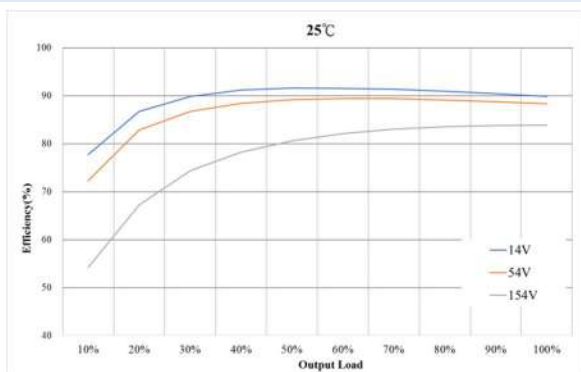


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

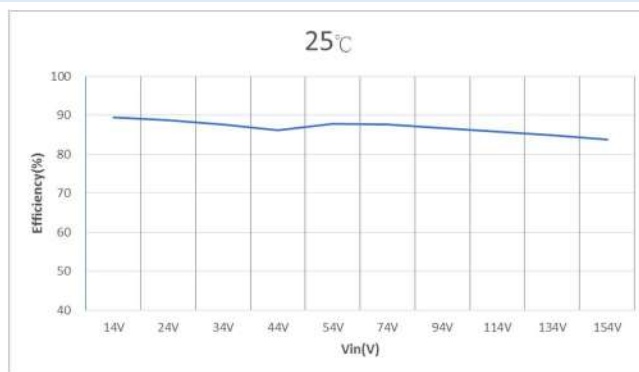


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

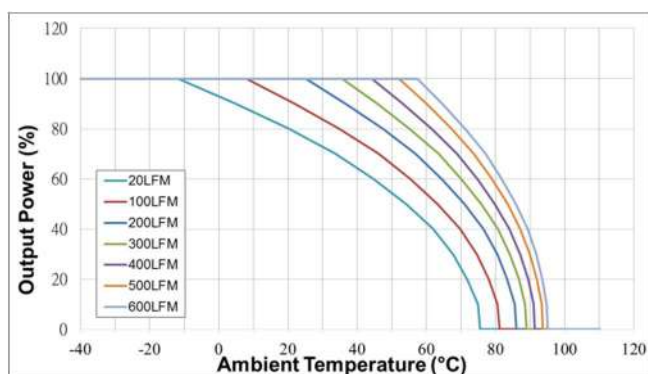


Figure 3 : Ambient Temperature VS. Output Power Derating Curves (Note: 20LFM = Free Air)

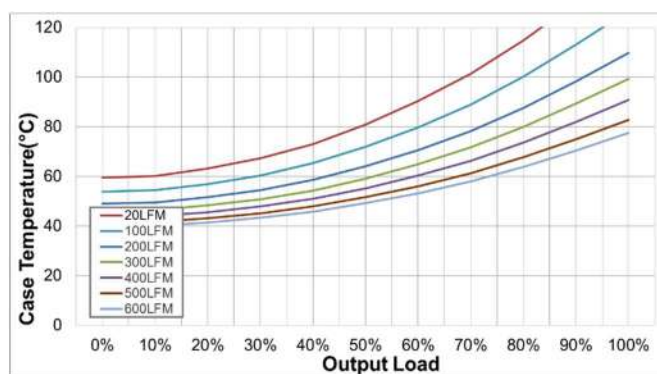


Figure 4 : Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

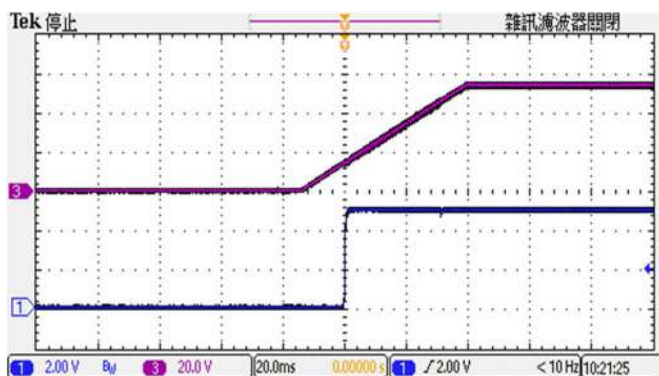


Figure 5 : CH1 = Vout, CH3 = Nominal Input
Typical Start-up waveform at Full load.

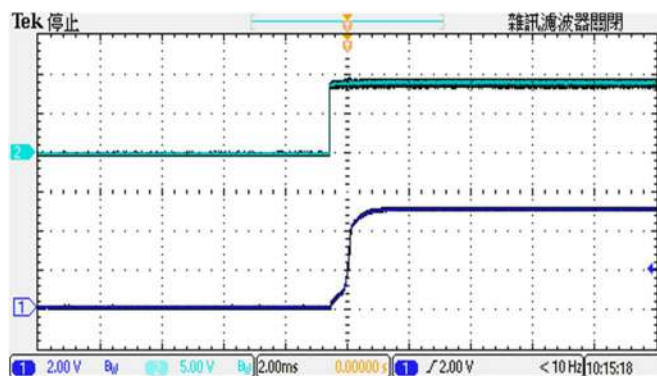


Figure 6 : CH1 = Vout, CH3 = Enable Pin
Typical Start-up waveform. Input voltage pre-applied

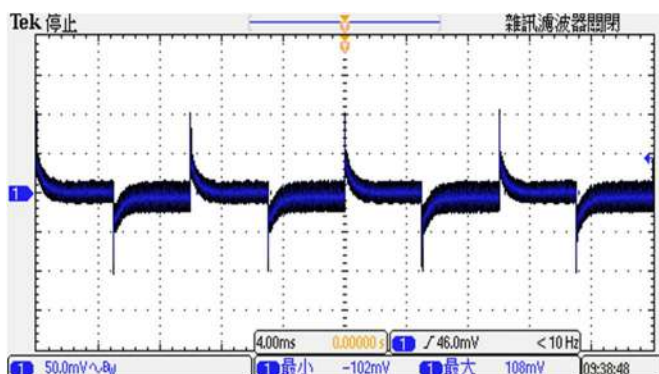


Figure 7 : Transient Response at Output step load
(V_{in} : Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1\text{A}/\mu\text{s}$)

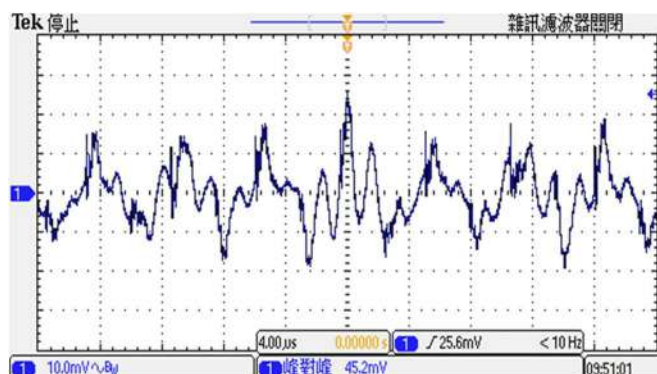


Figure 8 : Output Voltage Ripple & Noise at full load.
(V_{in} : Typical, With Output Capacitor to add 1uF MLCC)

Trimming Output Voltage – for Single output models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

- ✖ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.
- ✖ If the trim function is not used, leave the trim pin open.

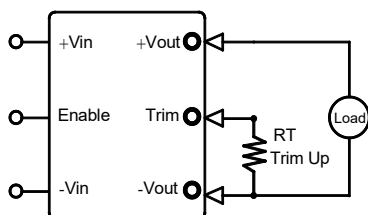


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

	Trim up resistor value(KΩ)									
Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	112.2	51.1	30.7	20.5	14.4	10.4	7.5	5.3	3.6	2.2
12	267.8	121.9	73.3	49.0	34.4	24.6	17.7	12.5	8.4	5.2
15	332.9	151.5	91	60.7	42.6	30.5	21.8	15.4	10.3	6.3
24	516.2	232.6	138.1	90.8	62.4	43.5	30	19.9	12	5.7

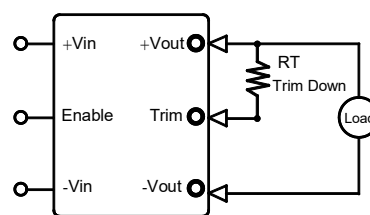


Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

	Trim down resistor value(KΩ)									
Vout	-1%	-2%	-3%	-4%	-5%	-6%	-7%	-8%	-9%	-10%
5	139.8	63.5	38.1	25.4	17.8	12.7	9.0	6.3	4.2	2.5
12	342.5	155.9	93.7	62.6	44.0	31.5	22.7	16.0	10.8	6.7
15	454.5	205	125.8	84.7	60.1	43.6	31.9	23.1	16.2	10.7
24	797.5	366.1	222.3	150.4	107.3	78.5	58	42.6	30.6	21

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high. See "Enable Function Input."

Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

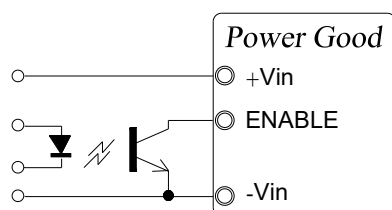


Figure 3. Driving the Enable Control pin

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture.

All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible.

Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as particular load and layout conditions. See Figure 4.

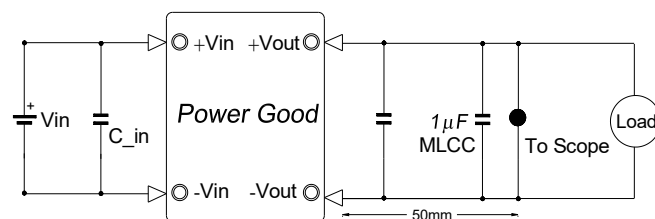


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)

