

## MPU16C series

V1.6

## 15W External Medical Grade Power Supply

The MPU16C series of AC/DC switching mode power supplies provide 15 Watts of continuous output power. All models meet FCC Part-18 ,CISPR-11 and EN55011 class B emission Limits, IEC 60601-1-2 and are designed to comply with UL/cUL, TUV T-mark and conformity assessment in CE marking. All units pass burn-in test at full load condition.

### FEATURES:

- \* Wide Operating Voltage, 80 to 275 VAC, 47 to 63 Hz
- \* IEC-320-C6 Input Inlet
- \* Single Output
- \* Crowbar Mode Over Voltage Protection
- \* Input to Output: 2MOPP
- \* High ESD Immunity
- \* Suitable Professional Healthcare Facility
- \* Ultra Low Earth Leakage Current < 0.1mA
- \* High Altitude of 3000m
- \* 5-Year Warranty



### APPLICATIONS:

- \* Patient Monitor
- \* Blood Pressure System
- \* Portable Medical Device
- \* ECG 、 EEG
- \* Medical Tablet

### GENERAL SPECIFICATION:

- \* **Short Circuit Protection:** Auto Recovery
- \* **Cooling:** Free Air Convection
- \* **Protection Classes:** Class I
- \* **Safety:** IEC 60601-1 Edition 3.1, IEC 60601-1 Edition 3.2, EN 60601-1, ANSI/AAMI ES60601-1, CSA-C22.2 NO. 60601-1

### APPROVALS:



### Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1 (Derate Linearly from 100% Load at 90VAC to 80% Load at 80VAC)	80		275	VAC
Input Frequency	Sine Wave	47		63	Hz
Output Power Range	See Rating Chart			15	W
Low Line Input Current	Full Load, Vin=100VAC		0.33		A
High Line Input Current	Full Load, Vin=240VAC		0.18		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			23	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			55	A
Safety Ground Leakage Current	Vin=264VAC, Fi=63Hz			0.15	mA
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC	0.5		1	%
Over Voltage Protection		112		132	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance		50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4000	VAC
Dielectric Withstanding Voltage (P-G)	Primary to PE, Limit Current <10mA			1500	VAC
EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

### Environmental:


Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.2 (Derate Linearly from 100% Load at 50°C to 50% Load at 70°C)	-10		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			15	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			8	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	200k			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV

## MPU16C series V1.6


## 15W External Medical Grade Power Supply

### SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing  $\pm 10\%$  of input voltage from nominal line at rated load.
- Load regulation is defined by changing  $\pm 40\%$  of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

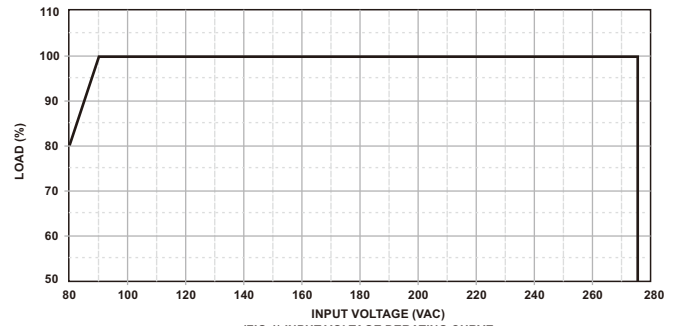


(FIG.1) INPUT VOLTAGE DERATING CURVE

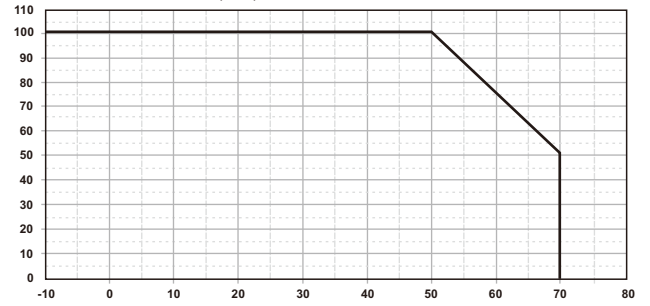

(FIG.2) TEMPERATURE DERATING CURVE

### MECHANICAL DIMENSIONS: ( UNIT: mm [inch] )

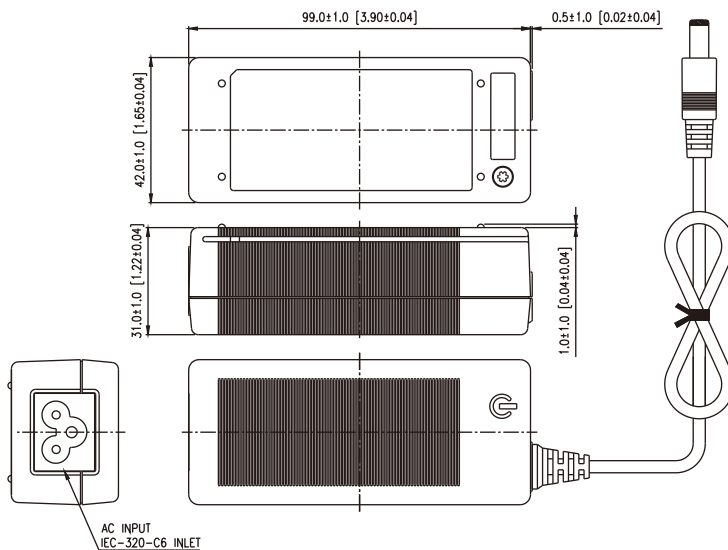

### OUTPUT CABLE RECOMMEND :

- Selected output connectors and wire, please refer to Appendix.
- MPU16C-102~103 are required to use AWG#16/4FT output cable.
- MPU16C-105~110 are required to use AWG#18/4FT output cable.
- The regulation and efficiency will be changed by modified output cable.

### PACKING :

- Net weight: 170g approx.
- Optional output connectors available contact sales for details.

### Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	min	max	min	max							
	(VDC)	(VDC)	(A)	(A)							
*MPU16C-102	5.0	5.99	2.16	2.60	13	50	±5	75	0.3	10	Hiccup
*MPU16C-103	6.0	8.0	1.62	2.16	13	60	±5	78	0.3	10	Hiccup
MPU16C-104	8.0	11.0	1.36	1.87	15	80	±5	81	0.3	10	Hiccup
*MPU16C-105	11.0	13.0	1.15	1.36	15	100	±5	81	0.3	10	Hiccup
*MPU16C-106	13.0	16.0	0.93	1.15	15	100	±5	81	0.3	10	Hiccup
*MPU16C-107	16.0	21.0	0.71	0.93	15	100	±5	81	0.3	10	Hiccup
*MPU16C-108	21.0	27.0	0.55	0.71	15	100	±3	82	0.3	10	Hiccup
*MPU16C-109	27.0	33.0	0.45	0.55	15	100	±3	84	0.3	10	Hiccup
*MPU16C-110	33.0	36.0	0.41	0.45	15	100	±3	85	0.3	10	Hiccup

[\*]=MOQ is required. Please contact sales.