

MPU250A series

V2.5

250W External Medical Grade Power Supply

The MPU250A series of AC/DC switching mode power supplies provide 250 Watts of continuous output power. All models meet FCC Part-18, CISPR-11 and EN55011 class B emission Limits, IEC 60601-1-2 and are designed to comply with UL/cUL and conformity assessment in CE marking. All units pass burn-in test at full load condition.



FEATURES:

- * Wide Operating Voltage, 90 to 264 VAC, 47 to 63 Hz
- * IEC-320-C14 Input Inlet
- * Single Output
- * Over Voltage Protection
- * Input to Output: 2MOPP
- * Active Power Factor Correction
- * High ESD Immunity
- * Suitable Professional Healthcare Facility
- * Low Earth Leakage Current < 0.25mA
- * 5-Year Warranty



APPLICATIONS:

- * Medical Equipment
- * Patient Monitor
- * Ultrasound System
- * Blood Chemistry Analyzer
- * Medical Image

APPROVALS:



GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class I
- * **Safety:** IEC 60601-1 Edition 3.1, IEC 60601-1 Edition 3.2, EN 60601-1, ANSI/AAMI ES60601-1, CSA-C22.2 NO. 60601-1

Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1	90		264	VAC
Input Frequency	Sine Wave	47		63	Hz
Power Factor Correction	Full Load, Vin=100~240VAC	0.95		1	
Output Power Range	See Rating Chart			250	W
Low Line Input Current	Full Load, Vin=100VAC		2.8		A
High Line Input Current	Full Load, Vin=240VAC		1.4		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			60	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			150	A
Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.25	mA
Efficiency	Full Load, Vin=230VAC, Detail to see Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC			1	%
Over Voltage Protection	Latch off, Recycle Input to Reset	120		180	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=110VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance	Primary to Secondary, 500VDC, 25°C/ 70% RH	50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4000	VAC
Dielectric Withstanding Voltage (P-G)	Primary to PE, Limit Current <10mA			1500	VAC
Dielectric Withstanding Voltage (S-G)	Secondary to PE, Limit Current <10mA			500	VDC
EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.1 & Fig.2	-10		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			15	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			8	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	200k			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV



MPU250A series V2.5

250W External Medical Grade Power Supply


SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

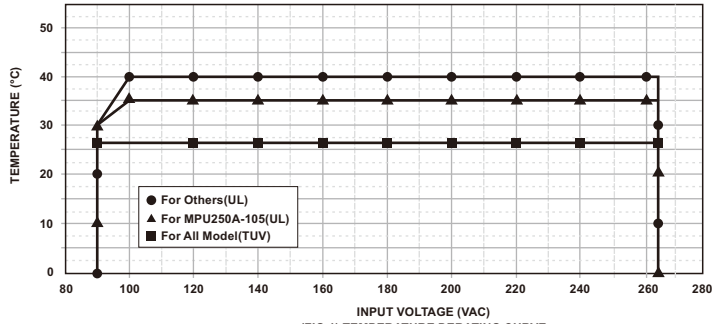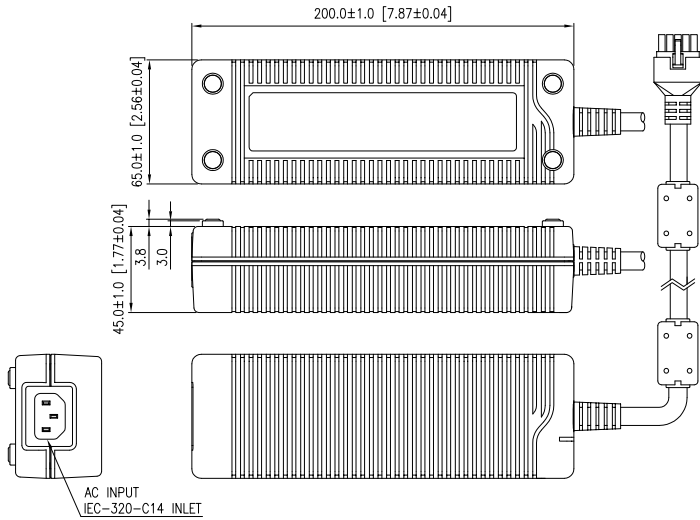

(FIG.1) TEMPERATURE DERATING CURVE

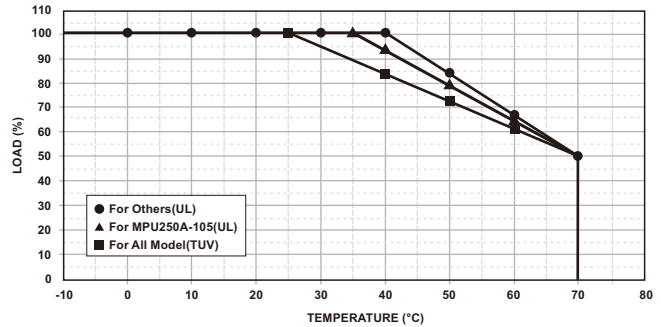

(FIG.2) TEMPERATURE DERATING CURVE

OUTPUT CABLE RECOMMEND :

- Selected output connectors and wire, please refer to Appendix.
- This series is required to use AWG#16/8C/2FT output cable.
- The regulation and efficiency will be changed by modified output cable.

PACKING :

- Net weight: 765g approx.
- Optional output connectors available contact sales for details.

Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)	Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
	(VDC)	(A)	(W)	(mVp-p)	(%)	(%)	(W)	(ms)	
MPU250A-105	12.0	19.16	230	120	±5	90	0.21	16	Hiccup
MPU250A-107	19.0	13.15	250	190	±5	91	0.21	16	Hiccup
MPU250A-108	24.0	10.41	250	240	±3	91	0.21	16	Hiccup
MPU250A-109	30.0	8.32	250	300	±3	91	0.21	16	Hiccup
MPU250A-110	36.0	6.94	250	360	±3	92	0.21	16	Hiccup
MPU250A-111	48.0	5.20	250	480	±3	92	0.21	16	Hiccup