

SPU131 series

V2.4

The SPU131 series of AC/DC switching mode power supplies provide 130 Watts of continuous output power. All models meet EN 55032, BS EN55032 class B and AS/NZS CISPR 32 class B emission limits and are designed to comply with UL/c-UL and CE marking conformity assessment. All units pass burn-in test at full load condition.



APPROVALS:



Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1	90		260	VAC
Input Frequency	Sine Wave	47		63	Hz
Power Factor Correction	Io=Full load, Vin=240VAC	0.95		1	
Output Power Range	See Rating Chart			130	W
Low Line Input Current	Full Load, Vin=100VAC		1.58		A
High Line Input Current	Full Load, Vin=240VAC		0.65		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			30	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			72	A
Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.75	mA
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC			1	%
Load Regulation	Vin=230VAC, 10~90% Load Change at Condition	3		5	%
Over Voltage Protection	Over Voltage Protection	112		132	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Temperature Coefficient	Full load, Vin=100~240VAC			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary			4242	VDC
Dielectric Withstanding Voltage (P-G)	Primary to PE			2121	VDC
EMC Emission	Compliance to EN55032 (CISPR32)			B	Class

Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.2 (Derate Linearly from 100% Load at 40°C to 50% Load at 70°C)	0		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			4	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV

130W External Power Supply for General Purpose

FEATURES:

- * Wide Operating Voltage 90 to 260 VAC, 47 to 63 Hz
- * IEC-320-C14 Input Inlet
- * Active Power Factor Correction
- * Single Output
- * ON/OFF Switch (Optional)
- * Crowbar Mode Over Voltage Protection
- * DoE VI
- * 3-Year Warranty

APPLICATIONS:

- * Printer
- * Industrial PC
- * Power Tools
- * DC Moto
- * AV Equipment
- * LED Lighting

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class I
- * **Safety:** IEC 62368-1 Edition 2.0, UL 62368-1, CAN/CSA-C22.2 NO.62368-1, EN 62368-1, J 62368-1

SPU131 series



V2.4

130W External Power Supply for General Purpose


SPECIFICATION NOTE :

1. Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
2. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
3. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
4. Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
5. The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1 μ F ceramic capacitor and a 47 μ F electrolytic capacitor).
6. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
7. Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

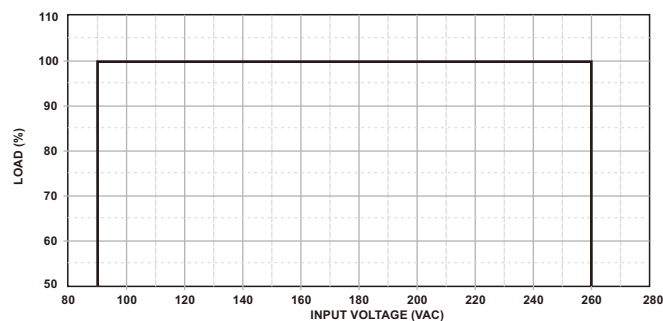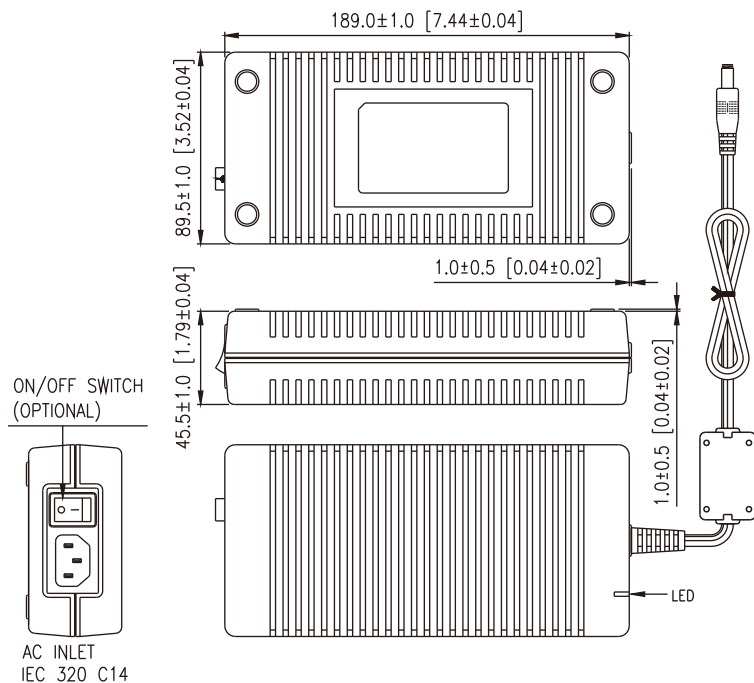

(FIG.1) INPUT VOLTAGE DERATING CURVE

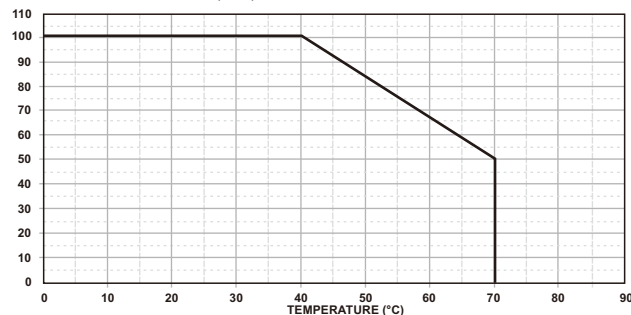

(FIG.2) TEMPERATURE DERATING CURVE

OUTPUT CABLE RECOMMEND :

1. Selected output connectors and wire, please refer to Appendix.
2. SPU131-105~106 are required to use AWG#16*5C/4FT output cable.
3. SPU131-107~108 are required to use AWG#16*4C/4FT output cable.
4. SPU131-109~110 are required to use AWG#16*2C/4FT output cable.
5. SPU131-111~112 are required to use AWG#18*2C/4FT output cable.
6. The regulation and efficiency will be changed by modified output cable.

PACKING :

1. Net weight: 778~800g approx.
2. Optional output connectors available contact sales for details.

Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. 10% Load Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
	min	max	min	max								
	(VDC)	(VDC)	(A)	(A)							(ms)	
SPU131-105	12.0	13.0	10.00	10.84	130	130	± 5	88	78	0.21	16	Hiccup
*SPU131-106	13.0	16.0	8.12	10.00	130	150	± 5	89	78	0.21	16	Hiccup
*SPU131-107	16.0	21.0	6.19	8.12	130	150	± 5	89	78	0.21	16	Hiccup
SPU131-108	21.0	27.0	4.81	6.19	130	200	± 3	89	78	0.21	16	Hiccup
SPU131-109	27.0	33.0	3.93	4.81	130	200	± 3	89	78	0.21	16	Hiccup
SPU131-110	33.0	40.0	3.25	3.93	130	250	± 3	89	78	0.21	16	Hiccup
SPU131-111	40.0	50.0	2.60	3.25	130	250	± 3	89	78	0.21	16	Hiccup
SPU131-112	50.0	55.0	2.36	2.60	130	300	± 3	89	78	0.21	16	Hiccup

[*] =MOQ is required. Please contact sales.